


Girders, braces, beams

POSSIBLE ENDING OF THE FACES

- 1) full height
- 2) claw

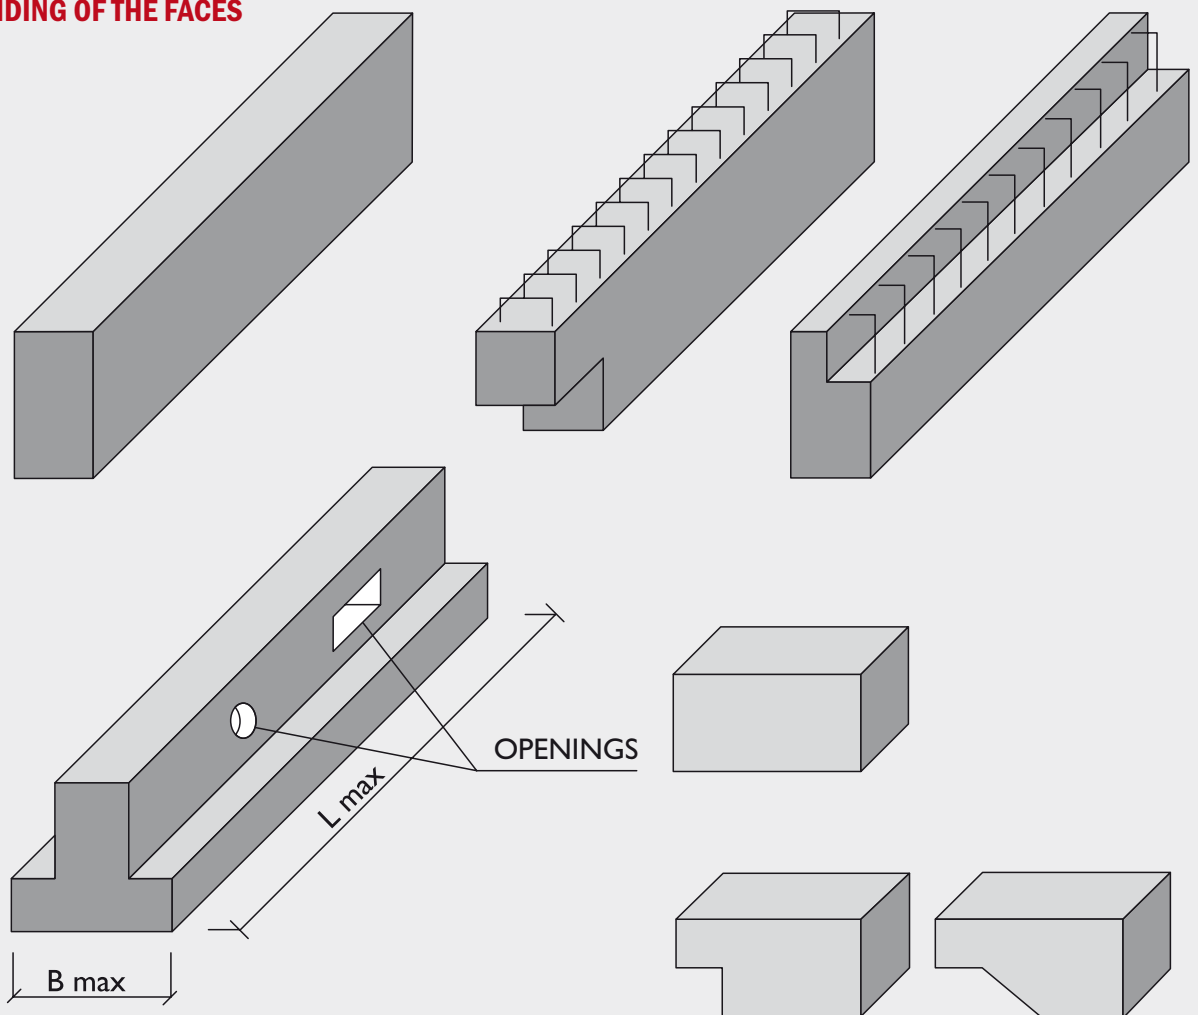

SELECTED PARAMETERS

Dimensions

B max = 1.75 m; L max = 24.5 m

Concrete

C 30/37-C 45/55

Max. weight

27 tons

Brackets

extensions beyond the supports with the full or reduced height

Mounting

with the use of rubber bearings

Surface finish

visible surfaces smooth – sight concrete

Coupling

1. the top surface is naturally rough or intentionally roughened with protruding stirrups for coupling with the additional concrete layer
2. smoothed top surface without protruding stirrups

Openings

- subject to static evaluation
- assembly brackets, anchoring elements and fixation – on agreement with the manufacturer

Edge chamfering

10/10 mm

VCES a.s., PREFA Division

VSD Pohřebáčka, 533 45 Opatovice nad Labem,
phone: +420 466 944 013, fax: +420 466 941 205, e-mail: prefa@vces.cz



A BOUYGUES CONSTRUCTION COMPANY